

MUNRO

Munro Multiset

When you want the best package at the best price then the **Munro Multiset** is what you need.

First in the world to combine a digger and a driver the **Multiset** has proven to be the best for over 50 years.

Covered by 6 months warranty and excellent service, the **Multiset** is the machine all others copy.

Features

- 227kg – 318 kg hammer
- Fastest hammer drop on the market
- Fastest flow dump valve on the market
- UHMWPE slide blocks for the lowest friction
- Hydraulic tilts
- OH&S compliant guarding
- Augers to 300mm, 12 inch
- 25-45 lpm oil flow required
- Adjustable drive shaft
- Hands free Autodigger
- Sideshift available

DELMADÉ

Shaping the Land


7 Roxford Avenue,
Westbury, TAS, 7303
Ph: 1800 335 623

Email: info@delmade.com.au
Website: www.delmade.com.au




Multiset Dimension Chart

Dimension / parameter	Dimension Ref		Multiset w/ Auto Digger
Base Width	A	mm	1100
		inch	43
Overall height, Min	B	mm	3180
		inch	125
Overall height, Dolly Up (Max)	B	mm	3490
		inch	137
Digging Depth	C	mm	1150
		inch	45
Height Under Dolly, Max	D	mm	2590
		inch	102
Height Under Dolly, Min	D	mm	1080
		inch	43
Dolly Stroke (Max Drop)		mm	1510
		inch	59
Extension Leg height addition		mm	300
		inch	12
Auger Capacity		mm	355
		inch	14
Side Tilt Capacity		degrees	12.5
For / Aft Tilt Capacity		degrees	12.5
Dolly Weight Min		kg	227
		lb	500
Max		kg	320
		lb	700
Remote Oil Flow Reqrd (LPM)		lpm	25-45
GPM		gpm	5.5-10
Remote Oil Press Reqrd Min (Bar)		Bar	135
		psi	2000
Weight		kg	500kg

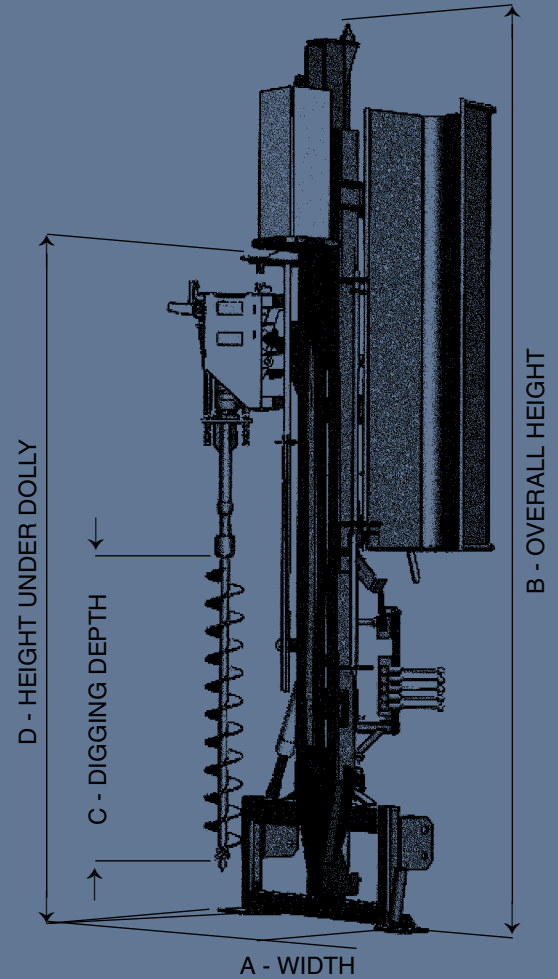

Sideshift Dimension Chart

Dimension / parameter	Dimension Ref		Sideshift
Overall Width		mm	1880
		inch	74
Dolly centre to tractor centre	E	mm	585
		inch	23
Retracted		mm	1355
		inch	53

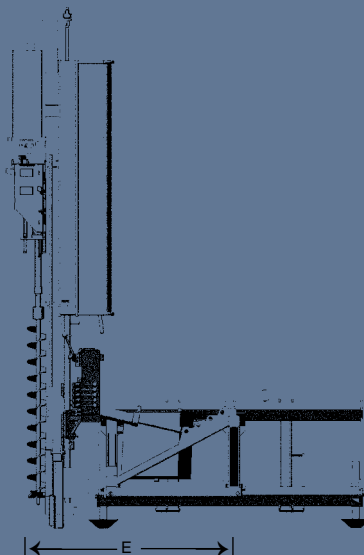

DELMADÉ
Shaping the Land

7 Roxford Avenue,
 Westbury, TAS, 7303

Ph: 1800 335 623

Email: info@delmade.com.au

Website: www.delmade.com.au

MUNRO

Munro Telesett

Top of the line.

All the advantages of the Munro Multiset with extra height.

Another world first for Munro. The **Telesett** retracts to a low height for transport and storage. Combining a digger and driver giving you the power to fence faster.

Covered by 6 months warranty and excellent service, the **Telesett** sets the standard others try to follow.

Features

- 227 kg – 272 kg hammer
- Fastest hammer drop on the market
- Fastest flow dump valve on the market
- UHMWPE slide blocks for the lowest friction
- Hydraulic tilts
- OH&S compliant guarding
- Augers to 300mm, 12 inch
- 25-45 lpm oil flow required
- Adjustable drive shaft
- Hands free Autodigger
- Sideshift available

Quality, Reliability, Service

DELMADÉ PTY LTD

Shaping the Land


7 Roxford Avenue,
Westbury, TAS, 7303
Ph: 1800 335 623

Email: info@delmade.com.au
Website: www.delmade.com.au



Telesett Dimension Chart

Dimension / parameter	Dimension Ref		Telesett w/ Auto Digger
Base Width	A	mm	1100
		inch	43
Overall height, Min	B	mm	3090
		inch	122
Overall height, Dolly Up (Max)	B	mm	4620
		inch	182
Digging Depth	C	mm	1150
		inch	45
Height Under Dolly, Max	D	mm	3670
		inch	144
Height Under Dolly, Min	D	mm	1110
		inch	44
Dolly Stroke (Max Drop)		mm	1510
		inch	59
Extension Leg height addition		mm	n/a
		inch	n/a
Auger Capacity		mm	355
		inch	14
Side Tilt Capacity		degrees	12.5
For / Aft Tilt Capacity		degrees	12.5
Dolly Weight Min		kg	227
		lb	500
Max		kg	272
		lb	600
Remote Oil Flow Reqrd (LPM)		lpm	25-45
GPM		gpm	5.5-10
Remote Oil Press Reqrd Min (Bar)		Bar	135
		psi	2000
Weight		kg	650kg

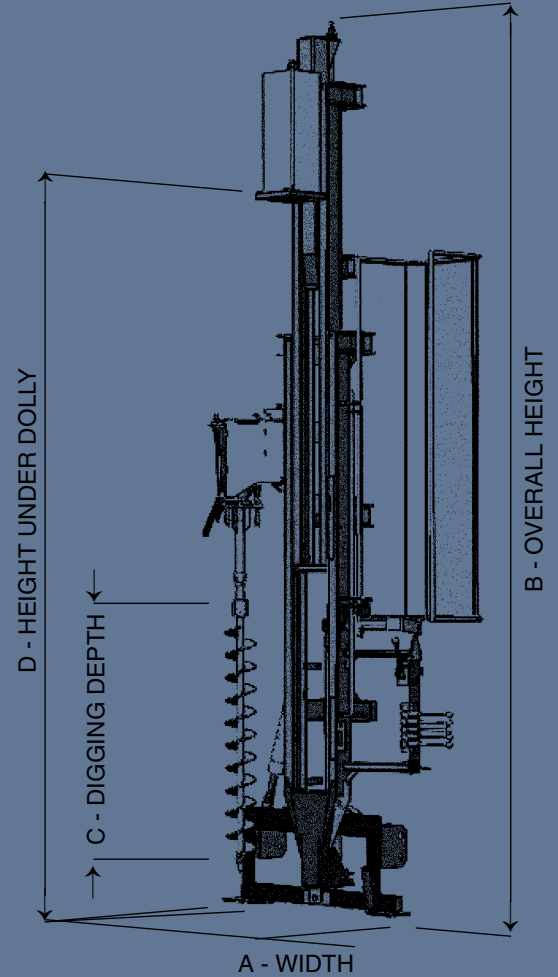

Sideshift Dimension Chart

Dimension / parameter	Dimension Ref		Sideshift
Overall Width		mm	1880
		inch	74
Dolly centre to tractor centre E	E	mm	585
		inch	23
Retracted		mm	1355
		inch	53

